

Dilan Ruiz Martínez

grupo 402

20-4-2025

Unnamed\diagnostics - HeidiSQL 12.14.0.7165

Archivo Editar Buscar Consulta Herramientas Ira Ayuda

Unnamed Base de datos: sys Procedimiento: diagnostics Consulta

32.0 KB

create_synonym_db

diagnostics

execute_prepared...

extract_schema_fr...

extract_table_fro...

format_bytes

format_path

format_statement

format_time

host_summary

host_summary_by...

host_summary_by...

host_summary_by...

host_summary_by...

host_summary_by...

innodb_buffer_sta...

innodb_buffer_sta...

innodb_lock_waits

io_by_thread_by_L...

io_global_by_file...

io_global_by_file...

io_global_by_wait...

io_global_by_wait...

latest_file_io

1 SELECT * FROM usuarios;

2

usuarios (5r x 5c)

#	1 id_usuario	2 nombre	3 email	4 edad	5 ciudad
1	1	Ana	ana.@gmail.com	28	Ciudad de México
2	2	Carlos Martínez	carlos.mtz@gmail.com	35	Guadalajara
3	3	María Fernández	maria.fernandez@gmail.com	22	Monterrey
4	4	José Ramírez	jose.ramirez@example.com	40	Puebla
5	5	Alvaro Torres	ALVARO.torres@gmail.com	30	Querétaro

40 INSERT INTO usuarios (nombre, email, edad, ciudad) VALUES ('Ana ', 'ana.@gmail.com', 28, 'Ciudad de México'), ('Carlos Martínez', 'carlos.mtz@gmail.com', 35, 'Guadalajara'), ('María

41 /* Info: Records: 5 Duplicates: 0 Warnings: 0 */

42 /* Filas afectadas: 5 Filas encontradas: 0 Advertencias: 0 Duración para 1 consulta: 0.000 seg. */

43 SELECT * FROM usuarios;

44 /* Filas afectadas: 0 Filas encontradas: 5 Advertencias: 0 Duración para 1 consulta: 0.000 seg. */

2: c1 (25 B) Conectado: 00:19 h MariaDB 12.2.2 Activo durante: 1 días, 03:43 h Hora del servidor: 01:54 p. Preparado.

Unamed Base de datos: sys Procedimiento: diagnostics

1 SELECT nombre,email FROM usuarios;|

usuarios (5r x 2c)

#	1 nombre	2 email
1	Ana	ana.@gmail.com
2	Carlos Martínez	carlos.mtz@gmail.com
3	María Fernández	maria.fernandez@gmail.com
4	José Ramírez	jose.ramirez@example.com
5	Alvaro Torres	ALVARO.torres@gmail.com

Dilan Ruiz Martínez

grupo 402

20-4-2025

Unnamed Base de datos: sys Procedimiento: diagnostics

```
1 SELECT nombre,edad FROM usuarios WHERE edad >18;
```

usuarios (5r x 2c)

#	1 nombre	2 edad
1	Ana	28
2	Carlos Martínez	35
3	María Fernández	22
4	José Ramírez	40
5	Alvaro Torres	30

Unnamed Base de datos: sys Procedimiento: diagnostics Consulta

```
1 SELECT nombre,edad FROM usuarios ORDER BY edad DESC;
```

usuarios (5r x 2c)

#	1 nombre	2 edad
1	José Ramírez	40
2	Carlos Martínez	35
3	Alvaro Torres	30
4	Ana	28
5	María Fernández	22


Unnamed Base de datos: sys Procedimiento: diagnostics Consulta*

```
1 INSERT INTO usuarios (nombre, email, edad, ciudad)
2 VALUES ('Ana ', 'ana@gmail.com', 28, 'Ciudad de México'),
```

Dilan Ruiz Martínez


grupo 402

20-4-2025

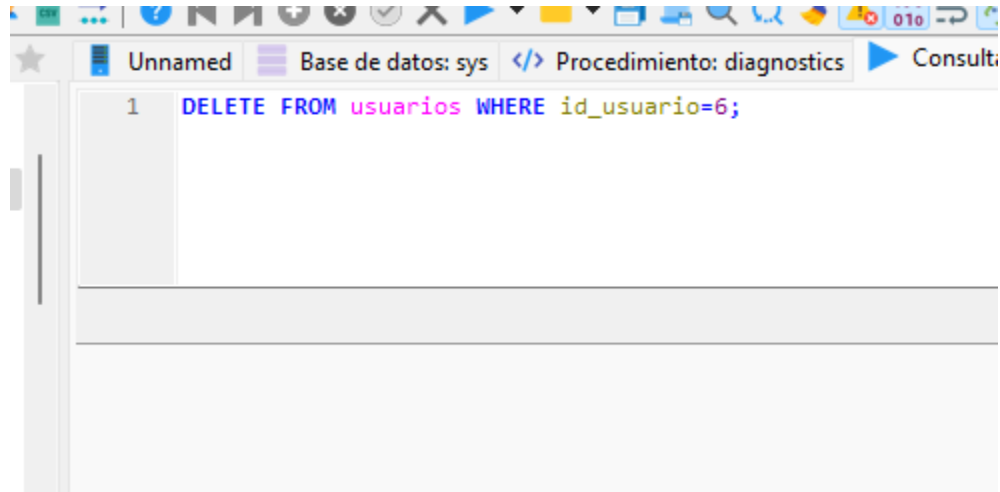


A screenshot of a SQL IDE window. The title bar shows 'Unnamed', 'Base de datos: sys', and 'Procedimiento: diagnostics'. The main text area contains a single SQL statement: `DELETE FROM usuarios WHERE id_usuario=6;`. The statement is numbered '1' in the left margin. The interface includes a toolbar at the top with various icons for file operations, execution, and navigation.

```
1 DELETE FROM usuarios WHERE id_usuario=6;
```

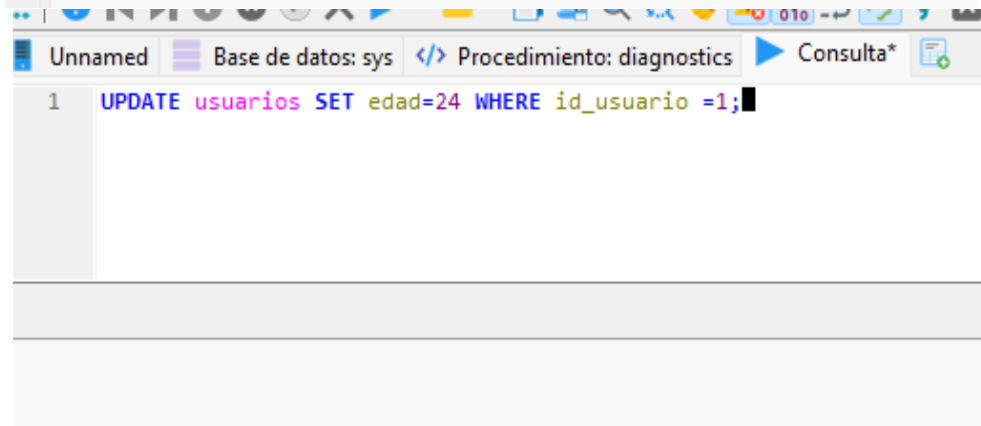

A screenshot of a SQL IDE window. The title bar shows 'Unnamed', 'Base de datos: sys', and 'Procedimiento: diagnostics'. The main text area contains a single SQL statement: `UPDATE usuarios SET edad=24 WHERE id_usuario =1;`. The statement is numbered '1' in the left margin. The interface includes a toolbar at the top with various icons for file operations, execution, and navigation.

```
1 UPDATE usuarios SET edad=24 WHERE id_usuario =1;
```

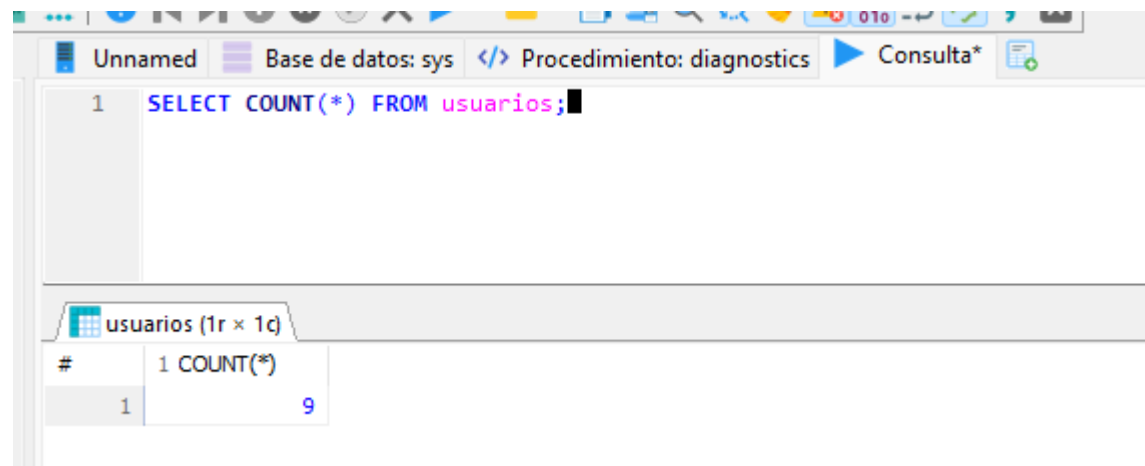

A screenshot of a SQL IDE window. The title bar shows 'Unnamed', 'Base de datos: sys', and 'Procedimiento: diagnostics'. The main text area contains a single SQL statement: `SELECT COUNT(*) FROM usuarios;`. The statement is numbered '1' in the left margin. Below the text area, a results pane is visible, showing a table with one row and one column. The table is titled 'usuarios (1r x 1c)'. The first row has a column header '1 COUNT(*)' and a value '9'.


```
1 SELECT COUNT(*) FROM usuarios;
```

usuarios (1r x 1c)	
#	1 COUNT(*)
1	9

Dilan Ruiz Martínez

grupo 402

20-4-2025

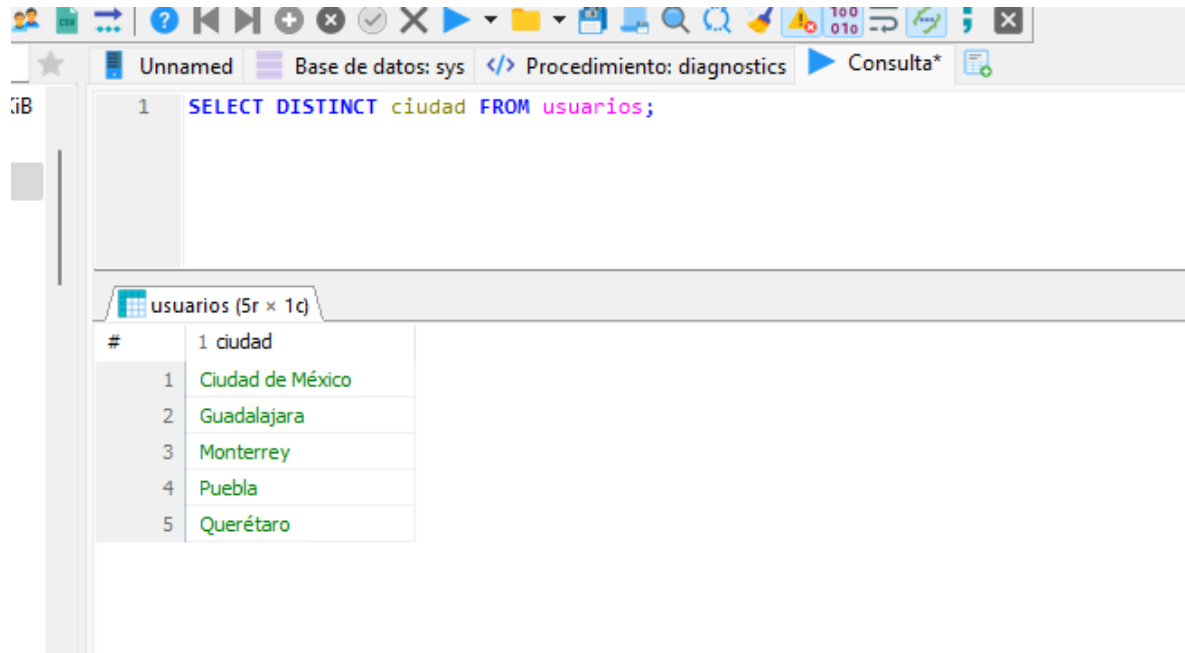


The screenshot shows a SQL IDE interface. The top toolbar includes icons for file operations, execution, and status. The main window displays a query in a text editor:

```
1 SELECT DISTINCT ciudad FROM usuarios;
```

Below the editor, the results are shown in a table titled "usuarios (5r x 1c)". The table has one column labeled "ciudad" and five rows of data:

#	1 ciudad
1	Ciudad de México
2	Guadalajara
3	Monterrey
4	Puebla
5	Querétaro

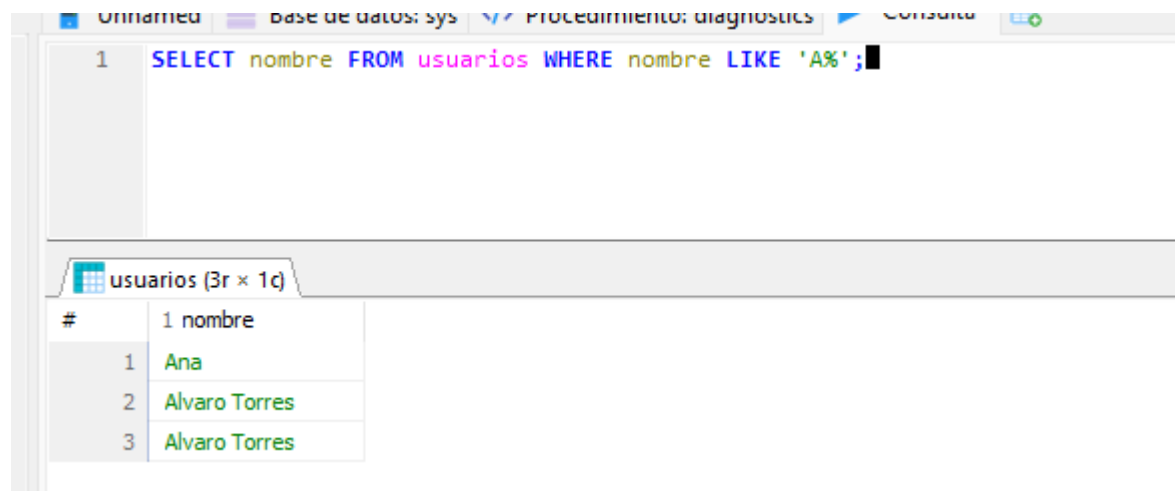

The screenshot shows the same SQL IDE interface. The main window displays a query in a text editor:

```
1 SELECT nombre FROM usuarios WHERE nombre LIKE 'A%';
```

Below the editor, the results are shown in a table titled "usuarios (3r x 1c)". The table has one column labeled "nombre" and three rows of data:

#	1 nombre
1	Ana
2	Alvaro Torres
3	Alvaro Torres

Dilan Ruiz Martínez

grupo 402

20-4-2025

Unnamed

Base de datos: sys

Procedimiento: diagnostics

Consulta*

1

SELECT * FROM usuarios LIMIT 5;

usuarios (5r x 5c)

#	1 id_usuario	2 nombre	3 email	4 edad	5 ciudad
1	1	Ana	ana.@gmail.com	24	Ciudad de México
2	2	Carlos Martínez	carlos.mtz@gmail.com	35	Guadalajara
3	3	María Fernández	maria.fernandez@gmail.com	22	Monterrey
4	4	José Ramírez	jose.ramirez@example.com	40	Puebla
5	5	Alvaro Torres	ALVARO.torres@gmail.com	30	Querétaro